

# SPECIFICATION SHEET

SIZE: 8.5 x 11.0  
PRINTED 1 SIDES BLACK



NOTE: USE ONLY APPROVED ARTWORK!

C S		SUPPLEMENTARY DRAWING	
MATERIAL		TITLE	
SPEC SHEET F/742 NUTONE SERIES FANS		PART NUMBER 99043343C	
BY: S JUSTMAN		P 01/14/04	
REVIEWED:		E	
UNLESS OTHERWISE SPECIFIED: LINEAR DIMENSIONS ARE IN INCHES TOLERANCE = ±0.015" ANGULAR DIMENSIONS ARE IN DEGREES TOLERANCE = ±1.0°		DO NOT SCALE DRAWING	
BROAN-NUTONE LLC HARTFORD, WISCONSIN			

DESCRIPTION	BY	DATE	CHANGE NO.	REV.
UPDATED DRAWING FORMAT; REMOVED REFERENCES TO MODELS 742SNHT AND 742WRHT	SCJ	05/17/07	ECN 007856	C
BRAND LOGO CHANGE	JEF	07/13/05	ECN 006664	B
RELEASED	SCJ	01/14/04	ECN 005770	A

<b>MUST BE ROHS COMPLIANT</b>	<b>CLASSIFIED CHARACTERISTIC SYMBOLS</b> CRITICAL - LIKELY TO RESULT IN HAZARDOUS OR UNSAFE CONDITION (SAFETY RELATED).  MAJOR - LIKELY TO CAUSE SERIOUS DAMAGE TO THE PRODUCT. SIGNIFICANTLY REDUCE THE FUNCTION, OR CAUSE UNACCEPTABLE APPEARANCE. 
-------------------------------	---

## DESCRIPTION

### LIGHT FIXTURE:

- Corrosion resistant, oil-rubbed bronze finish
- Frosted melon glass shade
- Close mount design
- Uses two 60 Watt maximum, type A, medium base bulbs. Bulbs not included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

### BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

### HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

NOTE: For installation in ceilings up to 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C




## SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	1.6	70	2.0	4" Round



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers.

Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

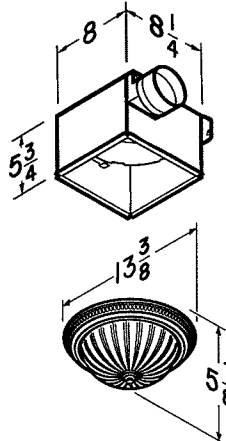


## INSTALLATION

Complete installation instructions are included with each Decorative Light / Fan.

# Decorative Light / Fan

## MODEL 742RBNT

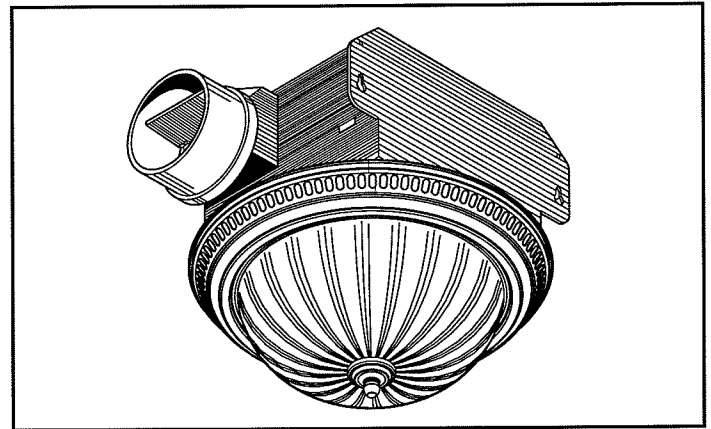

## ARCHITECT'S SPECIFICATION

- Decorative Light / Fan shall be NuTone Model 742RBNT as manufactured by NuTone according to specifications listed:
- Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.
- Blower assembly shall be removable and have a permanently lubricated motor.
- Light fixture assembly shall be plug-in, removable and include a frosted melon glass shade and a corrosion-resistant base with oil-rubbed bronze finish.
- Lamps shall be two 60 Watt maximum, type A, medium base, incandescent.
- Air delivery to be no less than 70 cfm and sound level no greater than 2.0 sones. Air and sound ratings shall be certified by HVI.
- Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-888-543-8687)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by <span style="float: right;">Date</span>