


Gallery MEDICINE CABINET



FEATURES/TYPICAL SPECIFICATIONS


- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 14" x 24" x 6"
- Formed and welded flush design steel housing (WB/SS)
 - 22 gauge 430 R/LON Stainless Steel
 - 1/8" thick float glass mirror on housing back
- Frameless Mirror door
 - 5/32" float glass mirror door front with 1" beveled edges, 4 sides
 - 3/32" float glass mirror door back with flat polished edges
 - Aluminum extrusion inner core with black, heat cured enamel paint finish and rubber seal.
- 170° euro hinge with soft-close mechanism (HG02) (2 typical)
- Reversible for left-hand or right-hand door swing
- 1/4" thick float glass shelves, adjustable (ADJ) (3 typical)
- Snap-Fit shelf supports (20 typical)
- Includes installation hardware
- Standard Pallet Quantity of 15 units

Finishes:

Housing: SS4—Brushed Stainless Steel

Mirror: 1 BVL—1" Bevel Edge

Frame: N/A

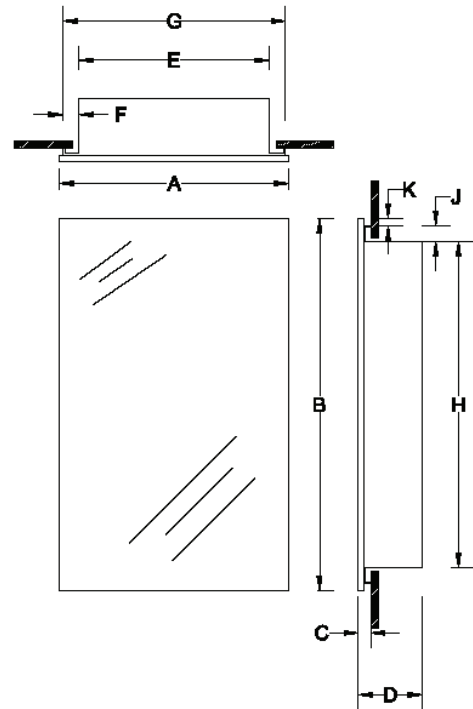

NOTE: Surface mount installation requires a Surface Mount Kit, 760024 (not included)

		Dimensions In Inches									
Model #	Description	A	B	C	D	E	F	G	H	J	K
72SS246D	Gallery 1DR 15x25x6 1BV WB/SS GL	15	25	1	7	13-1/2	3/4	15	23-1/2	3/4	0

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

* All models and material specifications are subject to change or withdrawal without notice.