


## GABLE MOUNTED POWERED ATTIC VENTILATORS



Combine the Model 353 or Model 35316 ventilators with the specially designed Automatic Shutter to get optimum efficiency and performance.

### FEATURES

- Precision balanced 14" metal blade for maximum air flow - minimum sound level
- 22 gage galvanized steel housing with ribs for added strength
- Mounting brackets included
- Thermally protected, permanently lubricated motor
- Built-in thermostat for automatic ventilation

### MODEL 433 AUTOMATIC SHUTTER (purchase separately):

- Counter-balanced aluminum vanes - open and close as fan starts and stops
- Better air flow than stationary attic louvers
- Extruded aluminum construction - fits flush with outside wall

### INSTALLATION ACCESSORIES (purchase separately):

- Model 445 Aluminum Roof Vent, 14" x 16" base, 8" opening, 4½" high  
FREE AREA: 45 sq. in. per vent
- Model 446 Aluminum Eave Vent, 4" x 16"  
FREE AREA: 22 sq. in. per vent
- Model 447 Aluminum Eave Vent, 8" x 16"  
FREE AREA: 54 sq. in. per vent

### CONTROLS DESIGNED FOR USE WITH THIS PRODUCT (purchase separately):

- Model 69V (Ivory)/69W (White) Single-Function Control
- Model 68V (Ivory)/68W (White) Two-Function Control
- Model 72V (Ivory)/72W (White) Electronic Variable Speed Control - 6 amp

### SPECIFICATIONS

| MODEL | VOLTS | AMPS | RPM  | CFM        | MIN. INLET AREA  |
|-------|-------|------|------|------------|------------------|
| 353   | 120   | 3.4  | 950  | 1140/900*  | 4.0/3.0* SQ. FT. |
| 35316 | 120   | 3.9  | 1420 | 1600/1160* | 5.5/3.9* SQ. FT. |

\*with Model 433 shutter/with standard HVI wood louver

### TYPICAL SPECIFICATION


Gable Mounted Attic Ventilator shall be Broan Model 353 or Model 35316.

Ventilator shall have metal blade and heavy-gauge galvanized steel housing with all mounting hardware included.

Motor to be thermally protected and permanently lubricated. RPM not to exceed 950 (Model 353) and 1420 (Model 35316).

Ventilator shall have built-in automatic thermostat.

Air delivery shall be no less than 1140 CFM (with 433 Shutter) and 900 CFM (with standard HVI wood louver) for Model 353. Air delivery shall be no less than 1600 CFM (with 433 shutter) and 1160 CFM (with standard HVI wood louver) for Model 35316. All ratings shall be certified by HVI. Unit to be U.L. Listed.

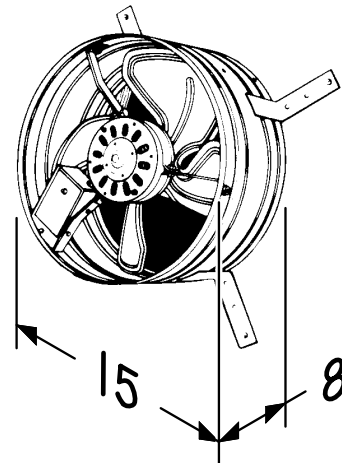

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Broan-NuTone LLC, 926 West State Street, Hartford, Wisconsin 53027 (1-800-637-1453)

| REFERENCE | QTY. | REMARKS | Project           |
|-----------|------|---------|-------------------|
|           |      |         | Location          |
|           |      |         | Architect         |
|           |      |         | Engineer          |
|           |      |         | Contractor        |
|           |      |         | Submitted by Date |