

SPECIFICATION SHEET

Meridian Medicine Cabinet



FEATURES/TYPICAL SPECIFICATIONS


- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 14" x 24" x 4-1/4"
 - Surface mount application requires kit #760024
- Formed and welded flush design housing (WB/ST)
 - 22 gauge steel construction with white, heat cured, acrylic paint finish
 - 1/8" thick float glass mirror on housing back
 - Electrical knock-outs for wire connections (3 typical)
- · Frameless mirror door
 - 1/8" thick float glass mirror door front with polished edges, 4 sides
 - 3/32" thick float glass mirror door back with polished edges
 - 24 gauge steel inner core with white, heat cured, acrylic paint finish
- 120 V GFCI Dual Receptacle (1 typical)
 - Hardwire applications
- 170° euro hinge (2 typical) soft-close mechanism (1 typical) (HG02)
- Reversible for left-hand or right-hand door swing by adjusting door location
- 3/16" thick float glass shelves, adjustable (2 typical)
- Snap-Fit shelf supports (20 typical)
- Includes installation hardware
- Pallet Qty: 24 units

Finishes:

Housing: PT01—Basic White

Mirror: POL1—Pencil Polished Edge

Frame: N/A

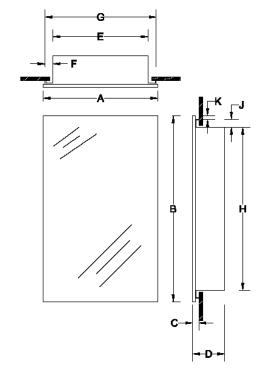

| | | Dimensions In Inches | | | | | | | | | |
|---------|---|----------------------|--------|---|---|--------|-----|----|--------|-----|------|
| Model # | Description | Α | В | С | D | E | F | G | н | J | K |
| 704317 | MERIDIAN 1DR 15X25 FMLS POL WB/ST GL/ADJ | 15-1/8 | 25-1/8 | 1 | 5 | 13-1/2 | 3/4 | 15 | 23-1/2 | 3/4 | 1/16 |

| REFERENCE | QTY. | REMARKS | Project | |
|-----------|------|---------|----------------------|------|
| | | | Location | |
| | | | Architect | |
| | | | Engineer Contractor | |
| | | | | |
| | | | Submitted by | Date |

^{*} All models and material specifications are subject to change or withdrawal without notice.